

DECKING OILS



Key Information

- Approx. coverage: 24m²/L with one coat
- No. of coats: 2
- Application temperature: +5°C
- Drying time: 12 hrs
- Sizes: 750ml, 2.5Litres and 10 litres

Benefits

- High UV-resistance
- Safe for animals and plants once dry
- Natural wood grain remains visible
- Very water and dirt resistant
- Reduces wood swelling and shrinkage
- Finish which does not crack, peel or flake

Osmo have recently changed some of the names of the Decking Oil colours for the Australian market, so they will differ from the colour charts printed in the Osmo brochures.

The colours displayed on the following pages show the new name and code number, and where the name has changed, the old name will be in brackets beside.

Transparent Colours

Allows the grain and character of the wood to remain visible.




Douglas Fir 004




Light Cedar 006 (Bangkirai)



Larch 009

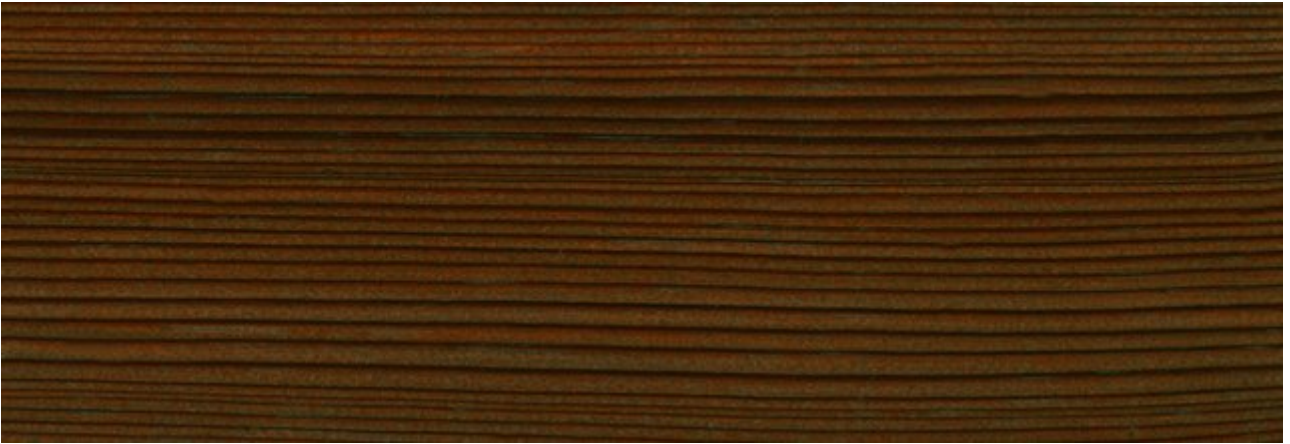

Hazelnut 010 (Thermowood)

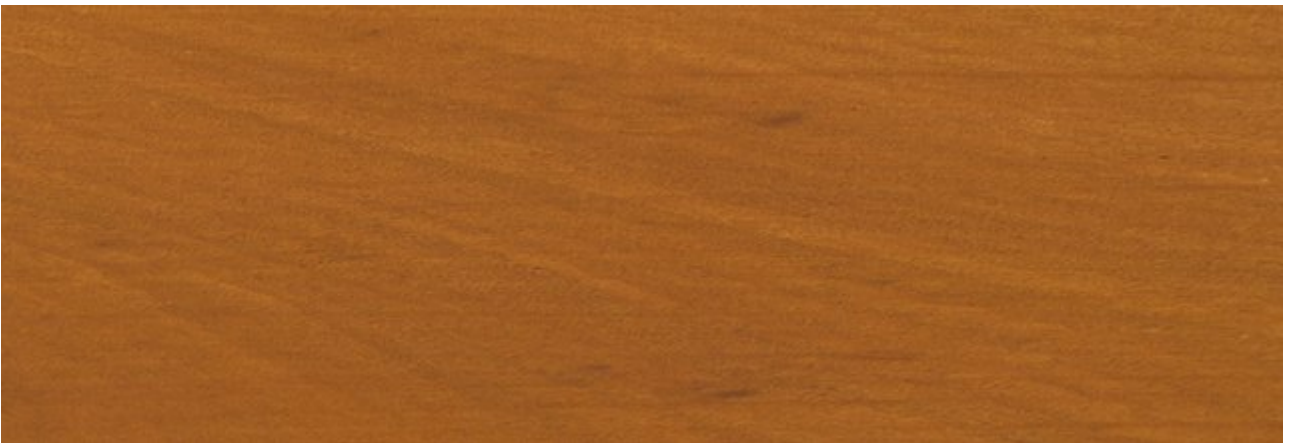

Pine 013 (Garapa)




Chestnut 014 (Massaranduba)



Red Cedar 016 (Bangkirai Dark)



Grey 019

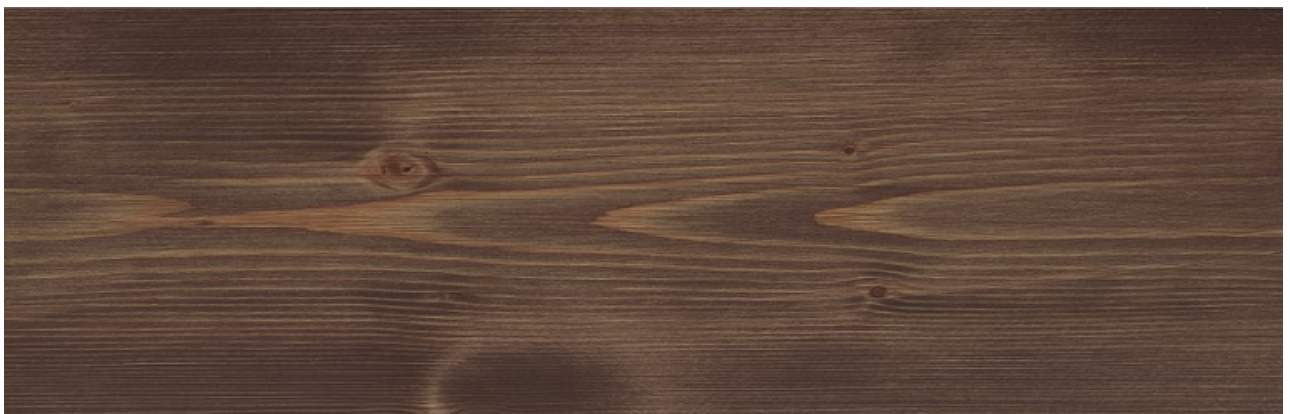

Dark Oak 021

The colours above are a true likeness of the original, after application onto Spruce. However, some variation may occur due to screen brightness, the uploading process and if these pages are printed.

It is recommended to test the colours you require on a small sample of your timber, as colours may appear differently on other wood species.